



IFS-50-OP Shown with included legs



Robotic welding is precise, virtually eliminating leaks.

OPEN POT BURNERS

- Flame heats ceramic plates located strategically outside of the frypot. Intense heat rapidly heats the stainless steel sides and the oil inside of the frypot. No tube fired burners and no air shutter adjustments needed.
- Snap acting thermostat has a 200°F 400°F (93°C 204°C) temperature range that extends oil life and produces a uniformly cooked product. Snap acting electronic thermostat has a 200°F - 400°F. (93°C - 204°C)
- temperature range. 100% safety shut-off valve.

STAINLESS STEEL FRYPOT

- Open Pot Frypot is easy to clean with no obstruction to clean around.
- Large 14" x 14" (356 x 356) frying area.

 Frypot sides are robotically welded stainless steel to virtually eliminate leaks.

 Fine mesh wire crumb screen is included.

 Deep drawn bottom facilitates draining, slants toward the drain.

 1-1/4" (32 mm) full port drain valve empties frypot quickly and safely.

- Two large, nickel-plated fry baskets with vinyl coated, heat protective, handles are included.
- Basket hangers are stainless steel.

EXTERIOR FEATURES

- Stainless steel front, door, sides, basket hanger and frypot. Welded and polished stainless steel seams.
- Full heat shield protects control panel.
- Full bottom chassis provides structural support.
- Plate mounted 6" high (152 mm) heavy duty stainless steel legs or optional casters assure secure support.
- One year parts and labor warranty. Limited warranty on frypot, stainless steel frypot is five years pro-rated.


LARGE COOL ZONE

- Captures and holds particles out of the fry zone
- Reduces taste transfer





OPEN POT FRYERS - 50 LB

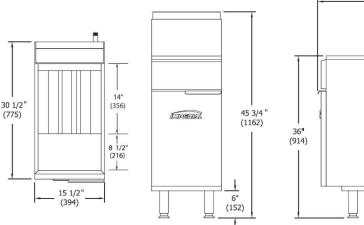

MODEL	OIL CAPACITY	GAS O	UTPUT	#OF BURNERS	SHIP WEIGHT (KG) LBS	
		BTU	(KW)	Bomveno	(NG) EBO	
IFS-50-OP	50 lbs. (27 L)	140,000	(41)	3	(114) 253	
IF-DS	N/A	N/A	N/A	N/A	(60) 130	

MODEL	FRYER AREA	DIMENSIONS			CRATED DIMENSIONS		
IFS-50-OP	14" X 14" (356 X 356 mm)	15½"W (394)	30½"D (775)	45¾"H (1162)	18"W (457)	34" (864)	35" (889)
IF-DS	N/A	15½"W (394)	30½"D (775)	44¼"H (1124)	17"W (432)	34" (864)	38" (965)

Measurements in () are metric equivalents







MANIFOLD	MANIFOLD	
NAT GAS PROPAI		SIZE
4.0" W.C.	10.0" W.C.	¾" (19 MM)

1 1/2" (38)

Specify elevation, if over 2,000 ft.

33 1/4" (845)

OPTIONS AND ACCESSORIES

- Stainless steel backguard, no shelf
- Fryer drain station with storage cabinet
- Automatic basket lifts
- Computer controls
- Manual timer
- Catering package for easy transporting
- Extra fry baskets with vinyl coated handles Gas shut off valve, ¾" N.P.T.
- Quick disconnect and flexible gas hose, 3/4" N.P.T.
- 6" (152 mm) casters

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters; or 2" (51 mm) overhang is required when curb mounted. 0" clearange from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

