



IFSSP175 (Built on Bottom)

MODEL NUMBERS

IFSSP250	IFSSP175
IFSSP350	IFSSP275
IFSSP450	IFSSP375
IFSSP550	IFSSP475
IFSSP650	IFSSP575
	IFSSP675

FILTER PACKAGE CHOICES

- Up to six fryers can be batteried into one fryer/filter system.
- Available for 50 and 75 lb (27 and 41 Liters) oil capacity fryers.
- Available in Snap Action Thermostats, Electronic Thermostats or Computer Controls.

LOCATED UNDER FRYERS

- Filter location under fryers saves valuable space.
- Internally plumbed oil drain and return line.

UNIQUE FILTER PAN DESIGN

- Filter pan is designed for maximum oil return
- Stainless steel construction is easy to clean and has a professional look.
- Positive-latching filter paper holder holds paper in place for optimal filtration.
- Quick disconnect connection offers quick and safe connection of the filtered oil back into the frypots.
- All oil drain and return lines are internally plumbed for convenience and safety.
- Reclamation system.

ROLLER-PUMP

- Up to six fryers can be batteried into one fryer/ filter system.
- 5.5 GPM pump with a 1/3 HP motor speeds up filtering process.
- Can pump oil into a disposal vat up to 20 feet away.


EXTERIOR FEATURES


- Continuous cabinet provides a professional look.
- 5" (127 mm) deep continuous stainless steel front landing ledge.
- Stainless steel precision welded frypot
- Includes casters, joiner strips and filter starter kit.
- Rear gas manifold with one point gas connection.





TUBE FIRED FRYERS/FILTERS SPACE SAVER FILTER SYSTEMS

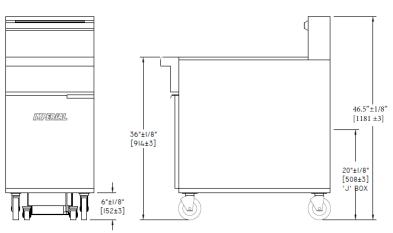



SPACE SAVER OPEN POT FRYER/FILTER SYSTEMS

MODEL	OIL CAPACITY	FRYER DEPTH	FRYERS	SHIP WEIGHT KG	SHIP WEIGHT LBS
IFSSP250	50 LBS. (41 L)	30" (752 MM)	2	252	556
IFSSP350	50 LBS. (41 L)	30" (752 MM)	3	367	809
IFSSP450	50 LBS. (41 L)	30" (752 MM)	4	482	1062
IFSSP550	50 LBS. (41 L)	30" (752 MM)	5	596	1315
IFSSP650	50 LBS. (41 L)	30" (752 MM)	6	711	1568
IFSSP175	75 LBS. (51 L)	34" (864 MM)	1	166	365
IFSSP275	75 LBS. (51 L)	34" (864 MM)	2	268	590
IFSSP375	75 LBS. (51 L)	34" (864 MM)	3	390	860
IFSSP475	75 LBS. (51 L)	34" (864 MM)	4	513	1130
IFSSP575	75 LBS. (51 L)	34" (864 MM)	5	635	1400
IFSSP675	75 LBS. (51 L)	34" (864 MM)	6	758	1670

FILTER ELECTRICAL REQUIREMENT

VOLTAGE	PHASE	HZ	AMPS
115 V	1	60	6.8 AMPS

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES

- Automatic basket lifts with computerized controls
- Manual controlled basket lifts
- Gas shut off valve, 3/4" N.P.T.
- Stainless steel tank cover
- Stainless steel side drain shelf
- Stainless steel side splash, 6"
- Filter paper 40# thickness, 20 microns, 100 sheets per box

MODEL	DIMENSIONS	CRATED DIMENSIONS
IFSSP250	31" W X 35" D X 46½" H 787 MM X 889MM X 1181MM	32½" W X 39" D X 49½" H 826 MM X 991MM X 1257MM
IFSSP350	46½" W X 35" D X 46½" H 1181 MM X 889MM X 1181MM	48" W X 39" D X 49½" H 1219 MM X 991MM X 1257MM
IFSSP450	62" W X 35" D X 46½" H 1575 MM X 889MM X 1181MM	63½" W X 39" D X 49½" H 1613 MM X 991MM X 1257MM
IFSSP550	71½" W X 35" D X 46½" H 1969 MM X 889MM X 1181MM	79" W X 39" D X 49½" H 2007 MM X 991MM X 1257MM
IFSSP650	93" W X 35" D X 46½" H 2362 MM X 889MM X 1181MM	94½" W X 39" D X 49½" H 2400 MM X 991MM X 1257MM

MODEL	DIMENSIONS	CRATED DIMENSIONS
IFSSP175	19½" W X 39" D X 46½" H 495 MM X 991MM X 1181MM	26" W X 41" D X 53½" H 660 MM X 1041MM X 1359MM
IFSSP275	39" W X 39" D X 45¾" H 911 MM X 991MM X 1181MM	40-1/2" W X 41" D X 53½" H 1029 MM X 1041MM X 1359MM
IFSSP375	58½" W X 39" D X 45¾" H 1486 MM X 991MM X 1181MM	60" W X 41" D X 53½" H 1524 MM X 1041MM X 1359MM
IFSSP475	78" W X 39" D X 45¾" H 1981 MM X 991MM X 1181MM	79-1/2" W X 41" D X 53½" H 2019 MM X 1041MM X 1359MM
IFSSP575	97½" W X 39" D X 45¾" H 2477 MM X 991MM X 1181MM	99" W X 43" 41" D X 53½" H 2515MM X 1041MM X 1359MM
IFSSP675	117" W X 39" D X 45¾" H 2972 MM X 991MM X 1181MM	118½" W X 43" 41" D X 53½" H 3010 MM X 1041MM X 1359MM



