

Champion[®]

The Dishwashing Machine Specialists

Project _____

Item No. _____

Quantity _____

UL-130 UNDERCOUNTER

STANDARD FEATURES

- **Wash Refresh™** – Automatically drains the water for the next cycle, ensuring heavily soiled items are always sanitized with new wash water
- Pumped drain
- **StemSure™** – Soft start to protect glasses and dishes from chipping and breaking
- Door safety switch
- Low-water tank heat protection
- Built-in detergent, rinse-aid, and sanitizer dispensing pumps
- Wash pump, 1-Hp motor
- Electric tank heater
- Upper & lower interchangeable wash/rinse spray arms
- Top mounted controls
- Stainless steel top and side panels
- Single phase connection
- Stainless steel construction
- 115V power cord
- One year parts and labor warranty


UL-130

Low Temperature
Undercounter
Dishwashing Machine




OPTIONS & ACCESSORIES

- Additional Dish Racks**
- 17" Stand**
- Chemical Alarm Kit (Mounted)**
- 6" Leg Stand**
- 1" Roller Kit (includes 4 casters)**



Stainless Steel



Peg

Flat



Photo is for general visual representation only. Please refer to specifications for the latest detailed product information.

SPECIFIER STATEMENT

Specified unit will be Champion model UL-130 undercounter low temperature dishwashing machine with built-in detergent, rinse-aid, and sanitizer dispensing pumps.

Features 141 second total cycle, 1 Hp pump motor, fill and dump, pumped drain. Constructed of stainless steel.

1 year parts and labor warranty.

Note: Vent hood is not recommended, as unit does not produce excessive steam.

Note: Always follow local building code guidelines.


Champion Industries, Inc.
3765 Champion Blvd, NC 27105
Tel: 336/661-1556 Fax: 336/661-1979
www.championindustries.com

UL-130

Low Temperature
Undercounter
Dishwashing Machine

Champion[®]
The Dishwashing Machine Specialists

Dimensions shown in inches and [millimeters]

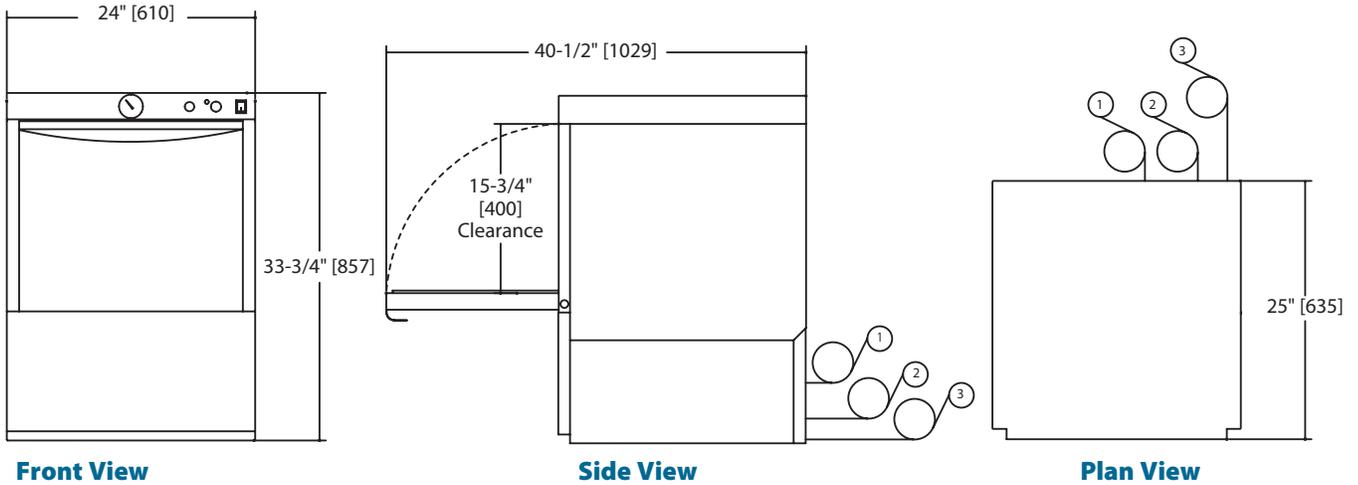

Utilities	
1 Electrical	115/60/1; 12-amp draw; to be fused at 15 amp. 4 ft. plug-in cord supplied.
2 Water connection	120°F minimum hot water connection (140°F recommended) 6 ft. long, 1/2" I.D. flexible fill hose with 3/4" hose connector. Flow pressure: 25-95 psi.
3 Pumped Drain	5/8" I.D. flexible reinforced hose, 6 ft. long. Max. drain flow 15 US gpm. Max. drain height 3 ft.

Complies with ANSI/ASSE 1440 Sections 1.4.3 & 1.4.4

	Uncrated	Crated
Height*	33-3/4"	39-1/2"
Width	24"	25"
Depth	25"	25-1/2"
Ship Wt. lbs/kg	153	173

* Front leveling feet provided.

Warning Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc.,
3765 Champion Blvd., NC 27105
336/661-1556 • Fax: 336/661-1979
ChampionIndustries.com

SPECIFICATIONS

Capacity	Racks per hr.	25
Motor horsepower	Wash	1
Water consumption	U.S. Gal. per hr. (Max. use)	32
	U.S. Gal. per rack	1.5
Temperatures °F	Wash	120°F Min (140°F recommended)
	Rinse	120°F Min (140°F recommended)
Heating	Tank heat, electric (kW)	.75
Time cycle in seconds	Wash	90
	Rinse	26
	Drain/fill	25
	Total cycle	141
Standard 20" x 20" rack complement	Dish	1
	Open	1