

DishStar® HT-E

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

DishStar® HT-E

Models

DishStar HT-E



Standard Features

- Automatic fill
- Push button start
- Built-in booster heater with Sani-Sure™ feature ensures proper sanitation
- Labyrinth type door design
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Universal timer
- Digital LED control panel
- Delime cycle
- Simplified controls allow easy access for operation and service
- Door switch
- One (1) each peg and combination rack included
- Built-in chemical pumps and priming switches

Mandatory Specs

Specify voltage _____

Options

- ☐ 1/2" Pressure Regulator
- ☐ Water Hammer Arrestor
- ☐ Back Panel
- ☐ Drain Quench System
- ☐ Scale Prevention System (SPS)
- ☐ Replacement Cartridge for SPS
- ☐ Tie Down

Accessories

- ☐ 36-Compartment Rack
 - ☐ 4-1/8" tall (105 mm)
 - ☐ 5-5/8" tall (143 mm)
 - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack
- ☐ Machine Stand
 - ☐ 6" (152 mm) high
 - ☐ 18" (457 mm) high

Specifications

Uses 0.65 gallons (2.47 liters) of water per rack

Uses 17.55 gallons (66.44 liters) of water per hour

Cleans 27 racks per hour

Three selectable cycles:

Normal - 100 seconds

Heavy - 168 seconds

Extra-Heavy - 268 seconds

Powerful 1 hp wash pump motor

Air insulated between body and stainless steel housing

Durable stainless steel construction

Notes:

A vent hood is not recommended above the Jackson DishStar HT-E as it does not produce excessive vapors. *Always check with the local building code to know what type of ventilation is required for commercial dish machine installations in your area.*

Normal operation of the DishStar HT-E generates steam that may escape from the door. Materials such as wood laminate, veneers, etc. are unsuitable for use in areas exposed to dishwasher steam and detergents. Stainless steel or other moisture-resistant shields are recommended for surfaces adjacent to DishStar HT-E sides and top.




Intertek



Intertek



DishStar® HT-E

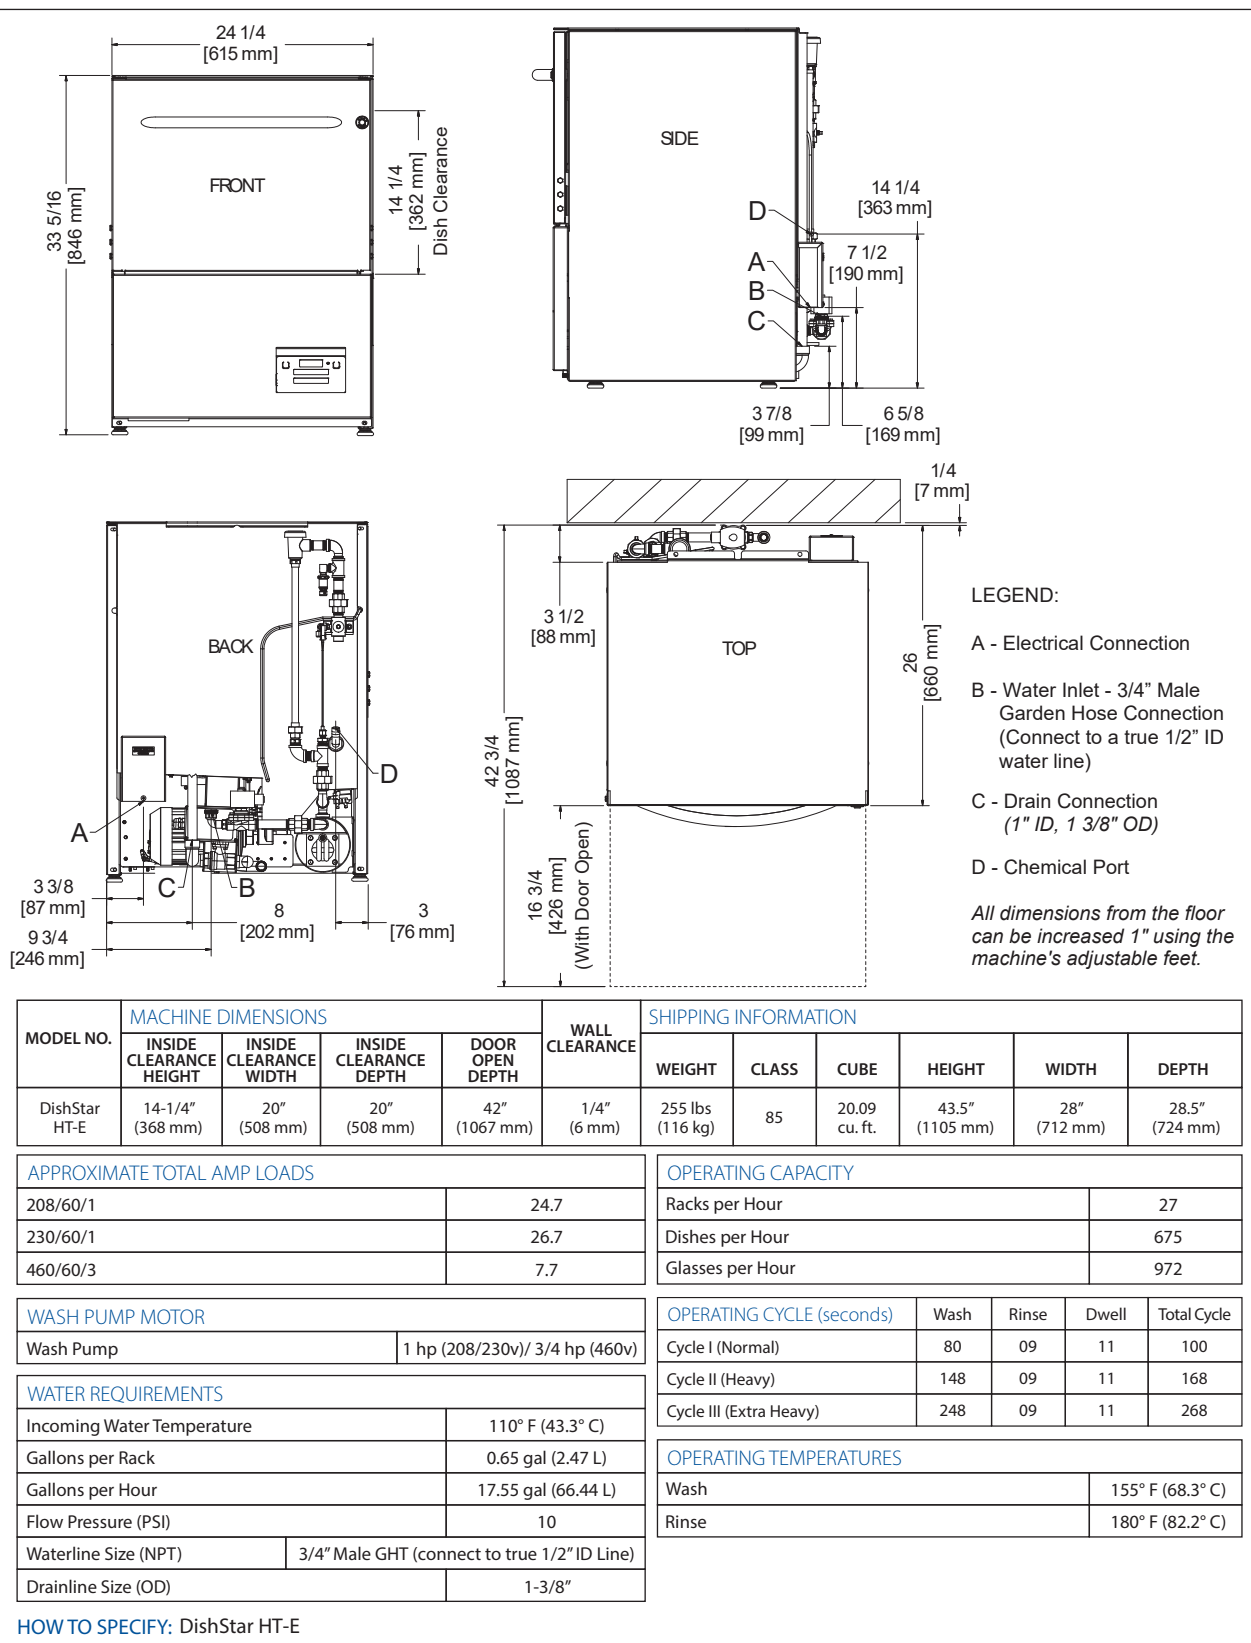

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O. Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-04-42 [10/03/17]

www.jacksonwws.com

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.