



a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

SELF-SERVE REFRIGERATED PREPARED FOODS MERCHANDISER

- MODEL** **SSRPF-3652**
 SSRPF-5052
 SSRPF-5952
 SSRPF-7752



Designed for those customers looking for up-market styling for maximum visual appeal that will drive product sales. Cases are available in lengths of 36", 50", 59", and 77".





STANDARD FEATURES

- Steel base construction with black laminated exterior. Other finishes optional.
- Black interior, glass end panels.
- LED top light and shelf lights.
- Three tiers adjustable metal shelves.
- Adjustable leg levelers.
- Thermometer.
- On-demand PTC condensate evaporator provided for a totally self-contained system.
- Easy clean, rustproof insulated evaporator coil compartment.
- Easily accessible light and power switch.
- Electronic temperature control maintains 38° to 40°F with on-demand defrost. Note: Case temperature will vary if the air curtain is disrupted.
- Rear access to the refrigeration system for quick and easy service.
- The rear of the display needs to be 6" from the wall.
- R404 Refrigerant.
- UL Safety and UL Sanitation Listed.
- DOE 2012 Compliant.

SELF-SERVE REFRIGERATED PREPARED FOODS MERCHANDISER

OPTIONAL ACCESSORIES:

- Reflective End Glass
- Special Exterior Finish
- Glass Shelves
- White or Stainless Interior (Including Shelves)
- Security Night Cover
- Solid Rear Sliding Access Doors
- Cord and Plug
- Remote Refrigeration
- Recessed Casters
- Condensate Pump
- Joining Kit for Continuous Line-ups
- Energy Saving Night Curtain
- Front Non-Refrigerated Display Merchandiser
- Legs

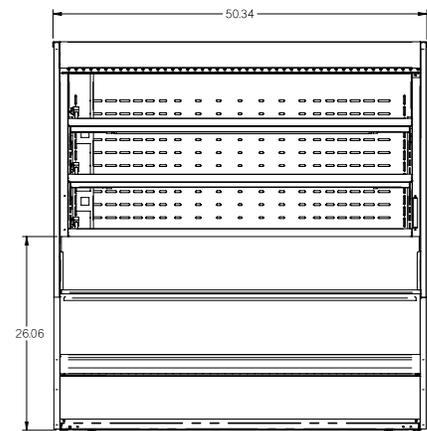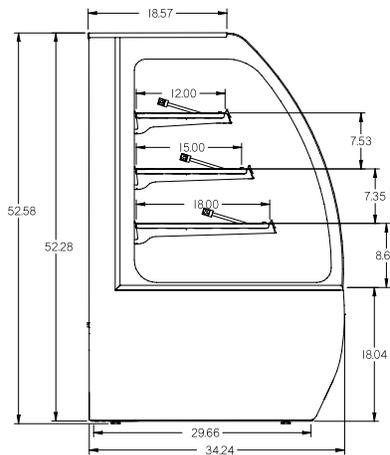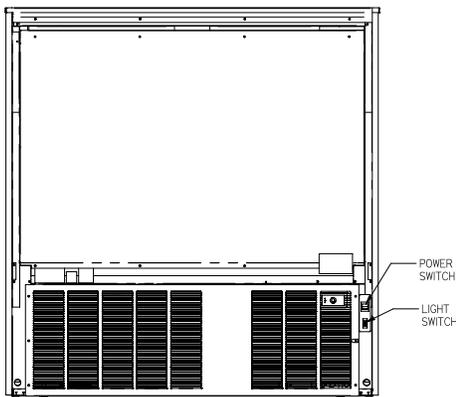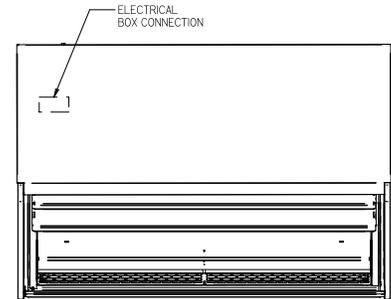

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Self-Contained with Condensate Pan	Remote 120/60/1 with Condensate Pan	NEMA Config.
<input type="checkbox"/> SSRPF-3652	36" x 34" x 52"	590	120/60/1 • 1/3 HP • 15 AMPS	9 AMPS	5-20P
<input type="checkbox"/> SSRPF-5052	50" x 34" x 52"	720	208-240/60/1 • 1/2 HP • 10 AMPS	10 AMPS	6-15P
<input type="checkbox"/> SSRPF-5952	59" x 34" x 52"	845	208-240/60/1 • 1/2 HP • 15 AMPS	13 AMPS	6-20P
<input type="checkbox"/> SSRPF-7752	77" x 34" x 52"	1,010	208-240/60/1 • 3/4 HP • 15 AMPS	14 AMPS	6-20P

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement - The minimum circuit ampacity and maximum fuse size is 20 amps.
- Refrigerated cases are designed to operate in a maximum environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201
PHONE: 800-356-4206 **FAX: 608-424-3234**
EMAIL: geninfo@federalind.com **WEBSITE: www.federalind.com**

