

Imperial Electrical Booster Water Heaters


Model: S-6, -7, -9, -12, -13, -15, -17, -18, -24, -27, -30, -36, -39, -40, -45, -54, -57

The Hatco Imperial Electric Booster Water Heater combines quality construction and rugged dependability to provide up to 573 GPH (2169 LPH) of sanitizing rinse water. Dishes and flatware air-dry instantly to save time, space and money. Storage capacity is 16 gallons (60 liters). Thermostats can be lowered to a 140° F (60° C) setting for low-temp dishmachines, and service area is accessible from the front to permit easy installation, even next to other equipment.

Standard features

- All models include a Castone® lined tank with a 10-year limited warrantv
- Features include a temperature/pressure relief valve, a pressure reducing valve, two temperature/pressure gauges, a hightemperature limit control, pilot indicator light, On/Off switch and a low-water cut-off to prevent element burnout due to a low water condition
- Each booster has a built-in heat trap and fiberglass insulation to minimize heat loss
- Hatco Electric Booster Heaters are factory pre-plumbed and pre-wired with calibrated immersion thermostats and hightemperature limit switch
- A stainless steel front panel and powder- coated silver-gray hammertone body is standard on all Imperial models

Project _	
Item #	
Quantity	

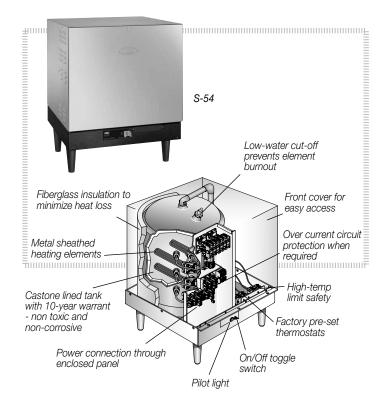

Options (available at time of purchase only)

- ☐ Stainless Seel Body and Base
- ☐ Security Package (Torx® screws and control cover)

Accessories

- ☐ Blended Phosphate Injection System (not for potable water)
- ☐ Additional Stainless Steel Floor Mounting Leg Assembly
- ☐ Additional Brass Pressure Reducing Valve with Bypass
- ☐ Additional Stainless Steel Adjustable Legs 6" 7" (152 178 mm)
- ☐ Shock Absorber (reduces water hammer)
- ☐ Back Pressure Relief Valve












Imperial Electrical Booster Water Heaters

Model: S-6, -7, -9, -12, -13, -15, -17, -18, -24, -27, -30, -36, -39, -40, -45, -54, -57

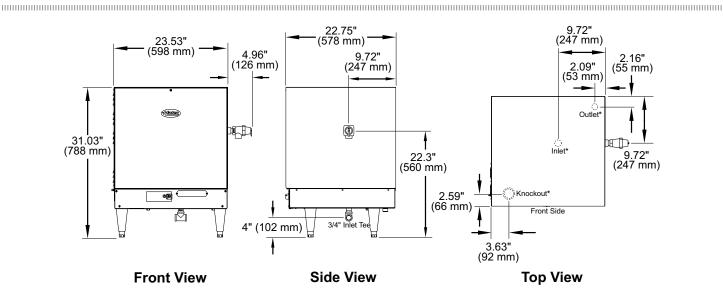

Outlet, Inlet, and Knockout are located on the bottom of unit.

Electrical Knockouts bottom—1-1/2" and 2'

SPECIFICATIONS Imperial Electric Booster Water Heaters

			1	phase	3	phase	
Model	kW	Volts	Amps	Breaker/ Fuse Size	Amps	Breaker/ Fuse Size	Ship Weight*
		208	29	40	25◆	40	
S-6*	6	240	25	40	22*	30	200 lbs.
3-0	0	480	_	_	11*	15	(91 kg)
		600	_	_	5.7	15	
		208	34	50	29◆	40	
C 74	_	240	29	40	25◆	40	200 lbs.
S-7*	7	480	_	_	13 *	20	(91 kg)
		600	_	-	6.7	15	
	9	208	43	60	38 *	50	
S-9*		240	38	50	33*	50	200 lbs.
		480	_	-	16.3◆	30	(91 kg)
		600	_	-	8.7	15	
S-12		208	58	90	33	50	
	12	240	50	70	29	40	200 lbs.
		480	_	-	14.5	20	(91 kg)
		600	_	_	11.6	20	
S-13	13.5	208	65	90	38	50	
		240	56.3	6.3 90 33	50	200 lbs.	
3-10	10.5	480	_	_	16.3	30	(91 kg)
		600	_	_	13	20	

23.53"W[†] x 22.75"D x 31.03"H with 6" (152 mm) legs (598 x 578 x 788 mm).

		1 phase		3 phase		
kW	Volts	Amps	Breaker/ Fuse Size	Amps	Breaker/ Fuse Size	Ship Weight*
	208	72	90	41.7	60	
15	240	62.5	90	36.1	50	200 lbs.
13	480	_	_	18.1	30	(91 kg)
	600	_	-	14.5	20	
17.25	208	_	-	47.9	60	200 lbs. (91 kg)
	208	86.5	125	_	_	200 lbs.
18	240	75	100	43.4	60	
	480	_	_	21.7	30	(91 kg)
	600	_	-	17	30	
	208	115.4	150	67.7	90	
24	240	100	125	57.8	90	214 lbs.
	480	_	_	29.9	40	(97 kg)
	600	_	-	23	30	
27	208	129.8	175	75	100	
	240	112.5	150	65	90	214 lbs.
	480			32.5	50	(97 kg)
	600	_	_	26	40	
	15 17.25 18 24	208 240 480 600 17.25 208 240 480 600 240 480 600 244 480 600 208 240 480 600 27 480 600	kW Volts Amps 15 208 72 240 62.5 480 — 600 — 17.25 208 — 208 86.5 240 75 480 — 600 — 240 110.4 240 100 480 — 600 — 27 208 129.8 240 112.5 480 — 600 — 600 —	kW Volts Amps Breaker/Fuse Size 208 72 90 240 62.5 90 480 — — 600 — — 17.25 208 — — 208 86.5 125 240 75 100 480 — — 600 — — 240 100 125 480 — — 600 — — 600 — — 208 129.8 175 240 112.5 150 480 — — 208 129.8 175 240 112.5 150 480 — —	kW Volts Amps Breaker/Fuse Size Amps 15 208 72 90 41.7 240 62.5 90 36.1 480 — — 18.1 600 — — 14.5 17.25 208 — — 47.9 208 86.5 125 — 240 75 100 43.4 480 — — 21.7 600 — — 17 240 100 125 57.8 480 — — 29.9 600 — — 23 208 129.8 175 75 240 112.5 150 65 480 — — 23 240 112.5 150 65 480 — — 23 240 112.5 150 65 480	kW Volts Amps Breaker/Fuse Size Amps Breaker/Fuse Size 15 208 72 90 41.7 60 240 62.5 90 36.1 50 480 — — 18.1 30 600 — — 14.5 20 17.25 208 — — 47.9 60 208 86.5 125 — — 240 75 100 43.4 60 480 — — 21.7 30 600 — — 17 30 240 100 125 57.8 90 480 — — 29.9 40 600 — — 23 30 27 208 129.8 175 75 100 480 — — 23 30 240 112.5 150 65 90

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. (800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com

[†] Add 5" (127 mm) for Temperature/Pressure Relief Valve.

^{*} Shipping weight includes packaging.

• Only 6, 7 & 9kW Models, 208 and 240 volts only, can be field converted to single phase (units are shipped 3-phase open delta). Larger branch circuit required than for balanced 3-phase of equal kW. (Balanced 3-phase available, consult factory.)

‡ 17.2kW models available in 208V 3-phase only.

§ 18kW models not available in 208V 3-phase.



Imperial Electrical Booster Water Heaters

Model: S-6, -7, -9, -12, -13, -15, -17, -18, -24, -27, -30, -36, -39, -40, -45, -54, -57

SPECIFICATIONS Imperial Electric Booster Water Heaters

imperial Liectric Booster Water Heaters								
				1 phase		phase		
Model	kW	Volts	Amps	Breaker/ Fuse Size	Amps	Breaker/ Fuse Size	Ship Weight*	
		208	144	200	88.3	125		
S-30	30	240	125	175	72.3	100	214 lbs.	
3-30	30	480	_	_	36	50	(97 kg)	
		600	_	_	28.9	40		
		208	173	225	100	125		
S-36	36	240	150	200	86.7	125	214 lbs. (97 kg)	
	30	480	_	_	43.3	60		
		600	_	_	34.7	50		
S-39 3			208	187.5	250	108	150	
		240	163.5	225	94	125	214 lbs.	
	39	480	_	-	47	60	(97 kg)	
		600	_	_	37.6	50		
S-40		208	_	_	112.5	150		
	40.5	240	-	-	97.5	125	224 lbs.	
	40.5	480	_	_	48.8	70	(102 kg)	
		600	_	_	39	50		

			1 phase		3 phase			
Model	kW	Volts	Amps	Breaker/ Fuse Size	Amps	Breaker/ Fuse Size	Ship Weight*	
		208	_	_	125	175		
C 45.	45	240	188	250	108	150	224 lbs.	
S-45°	45	480	_	_	54	70	(102 kg)	
		600	_	_	43.4	60		
S-54"	54	208	_	_	150	200		
		240	_	_	130	175	224 lbs.	
		480	_	_	65	90	(102 kg)	
			_	_	52	70		
S-57"			208	_	_	158.4	200	
	57	240	_	_	137.3	175	224 lbs.	
		480	_	_	68.6	90	(102 kg)	
		600	_	_	54.9	70		

^{*} Shipping weight includes packaging.

Dimensions

23.53"W[†] x 22.75"D x 31.03"H with 6" (152 mm) legs (598 x 578 x 788 mm).

WATER TEMPERATURE RECOVERY TABLE

Model	40°F (22°C) Rise	70°F (39°C) Rise
S-6	60 gph (227 lph)	34 gph (129 lph)
S-7	70 gph (265 lph)	40 gph (151 lph)
S-9	90 gph (341 lph)	52 gph (197 lph)
S-12	120 gph (454 lph)	69 gph (261 lph)
S-13	135 gph (511 lph)	77 gph (292 lph)
S-15	151 gph (572 lph)	86 gph (326 lph)
S-17	173 gph (655 lph)	99 gph (375 lph)
S-18	181 gph (685 lph)	103 gph (390 lph)
S-24	241 gph (912 lph)	138 gph (522 lph)
S-27	271 gph (1026 lph)	155 gph (587 lph)
S-30	301 gph (1139 lph)	172 gph (651 lph)

Model	40°F (22°C) Rise	70°F (39°C) Rise
S-36	361 gph (1367 lph)	206 gph (780 lph)
S-39	391 gph (1480 lph)	224 gph (848 lph)
S-40	407 gph (1541 lph)	232 gph (878 lph)
S-45	452 gph (1711 lph)	258 gph (977 lph)
S-54	542 gph (2052 lph)	310 gph (1174 lph)
S-57	573 gph (2169 lph)	326 gph (1234 lph)

WATER QUALITY REQUIREMENTS

Incoming water in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being supplied to booster heater(s). Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

PRODUCT SPECS Electric Booster Water Heater

The Electric Booster Water Heater to supply the final 180°F (82°C) rinse for the dishwasher shall be an Imperial Model ... as manufactured for commercial use by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The booster shall have the capacity to heat ... gph (lph) from ... °F to 180°F (... °C to 82°C and it shall be rated at ... kW, ... volts, ... phase. The tank shall be designed for a working pressure of 150 psi (1034 kPa) and include a Hatco Castone® lining.

The heater shall be complete with all internal plumbing, including %" NPT pipe and fittings for inlet and outlet. All controls shall be built-in, including contactors and prewired in accordance with UL #1453 and 422.11 NEL 2002. Proper surface mounting circuit breaker or fused disconnect switch shall be provided by electrical contractor.

Electric heating elements shall be metal sheathed, controlled by ambient compensating thermostats. The booster shall be protected with high temperature limit switch (ECO) and low-water cut-off.

The heater shall consist of stainless steel front and silver-gray hammertone body with standard 6" (152 mm) legs (or stainless steel body, base, and stainless steel adjustable legs).

The heater shall include a temperature/pressure relief valve, high-temperature pressure reducing valve with bypass, and two indicating temperature/pressure gauges.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com

Not available in 208V single phase.

[&]quot;Not available in 208V or 240V single phase.

[†] Add 5" (127 mm) for Temperature/Pressure Relief Valve.